POWER-UP CURRENT CONSUMPTION FOR METASTABLE 72Mb SRAM IN 90nm (9sf)
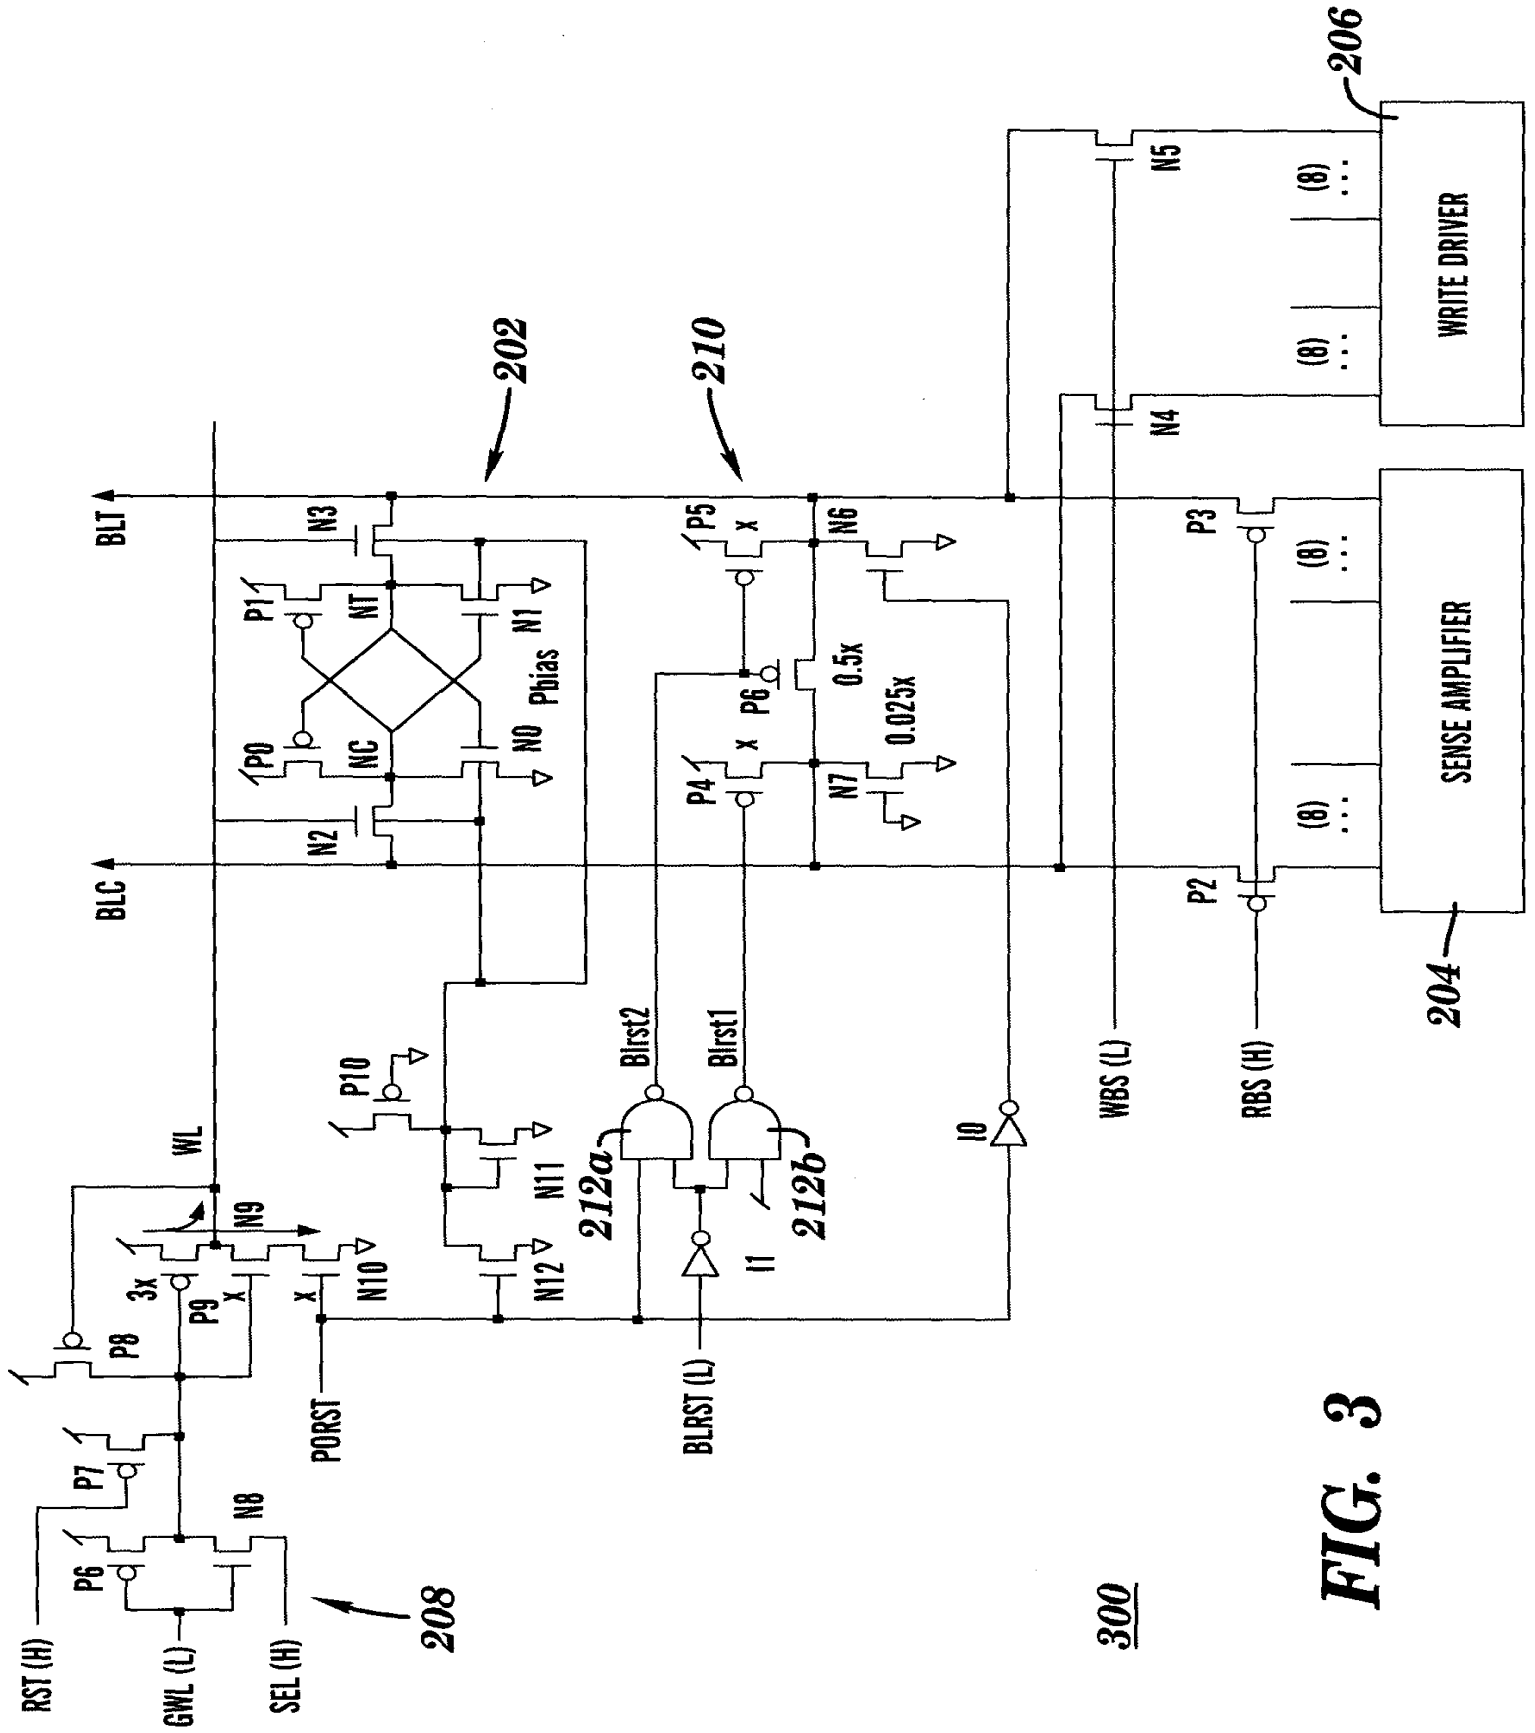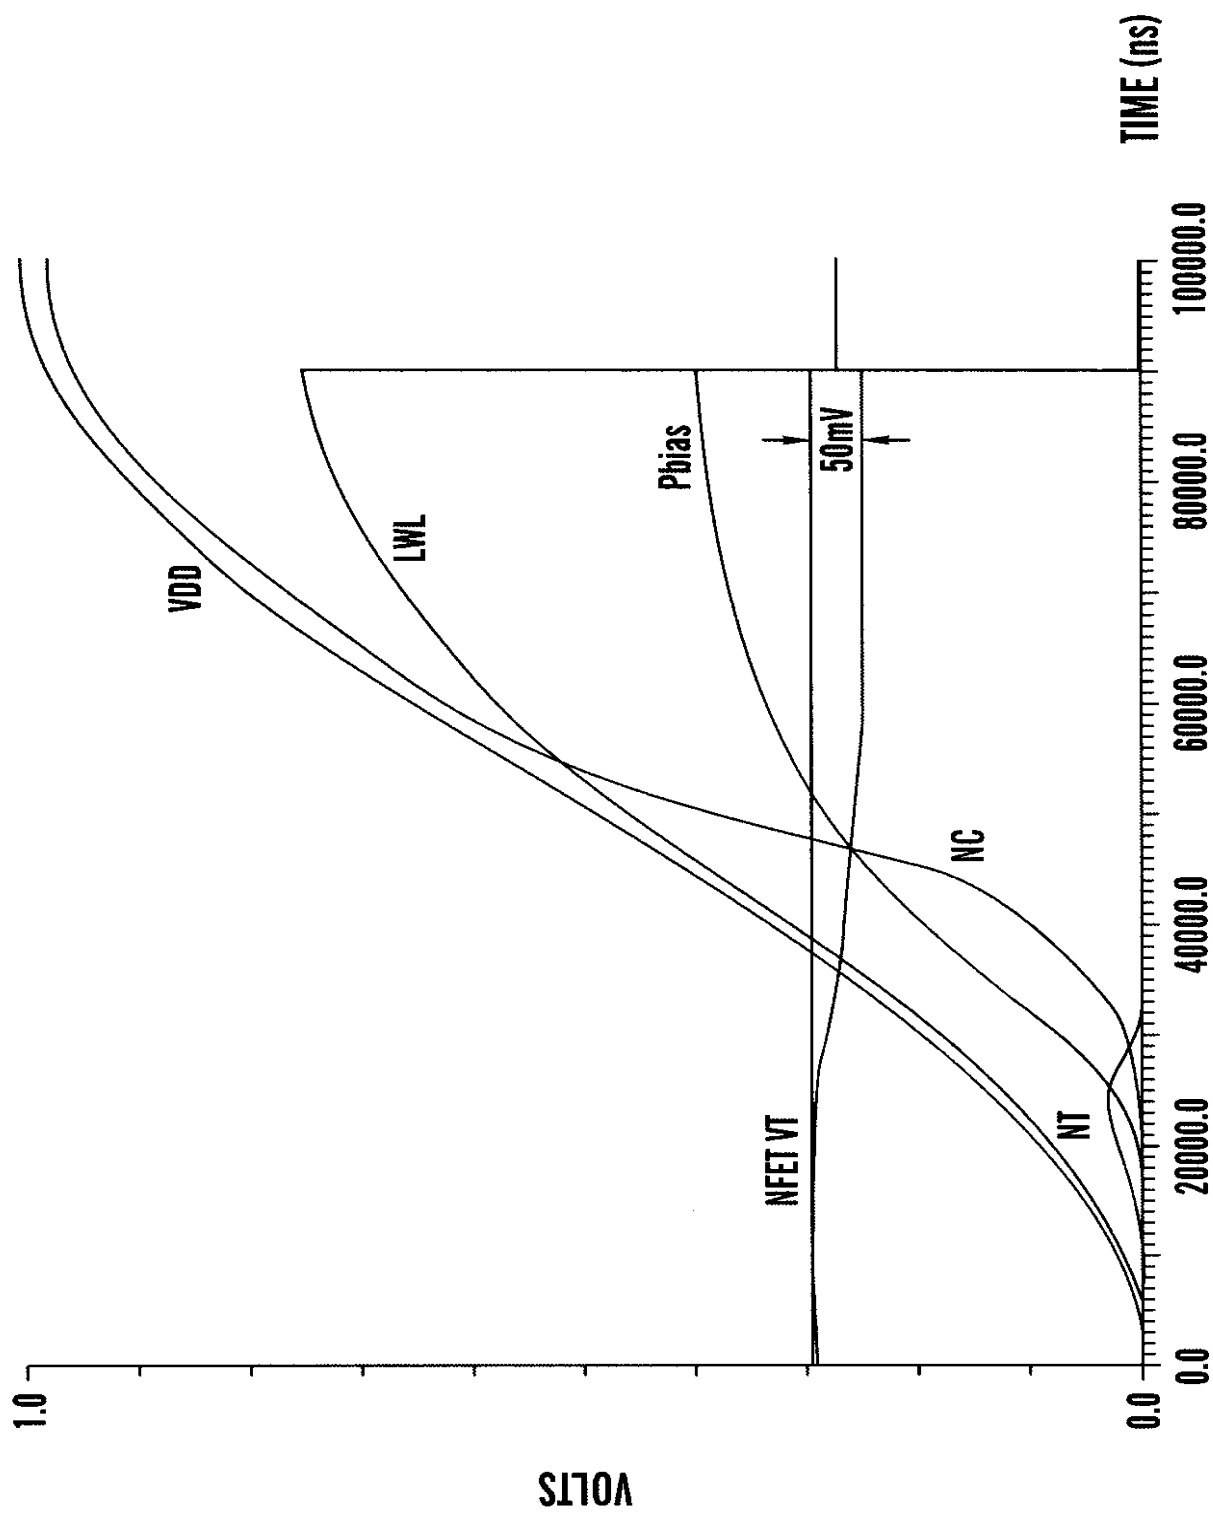
FIG. 1

FIG. 2

FIG. 3

POWER-UP WAVEFORMS WITH 1μA CURRENT SOURCE TO VSS ON CELL NODE NC

FIG. 4